

# B-Line

B-Line S.r.l.  
Via Galileo Galilei, 13/B  
35030 - Sarmeola di Rubano (PD)  
ITALY


T. +39 049 8978245  
F. +39 049 633499  
E. [info@b-line.it](mailto:info@b-line.it)  
W. [b-line.it](http://b-line.it)

**MERANO**

Design by Raffaella Mangiarotti  
Ikka Suppanen

CARTELLA TESSUTI / FABRIC REFERENCE CHART


PT PATIO KVADRAT  
100% Trevira CS

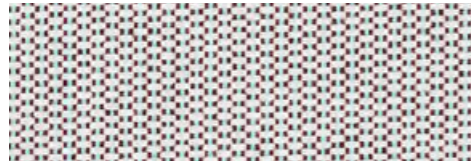

TPT220



TPT150

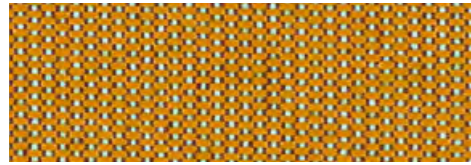


TPT450



TPT970


RX REMIX 3 KVADRAT  
90% Lana vergine / New wool  
10% Nylon

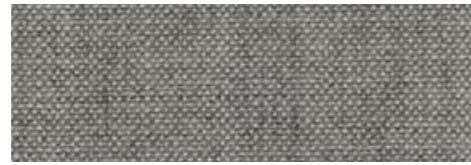


TRX123



TRX242

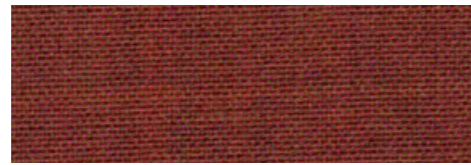

TRX653

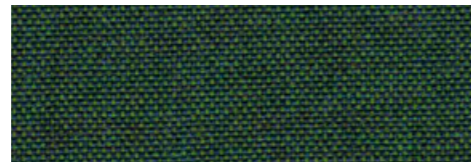

TRX982




TRX762



TRX173


ST STEELCUT TRIO 3 KVADRAT  
90% Lana vergine / New wool  
10% Nylon

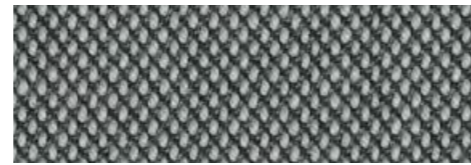


TST133



TST205

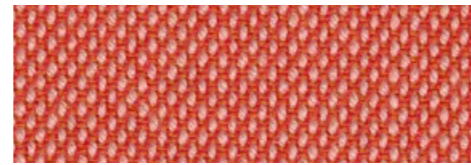


TST526

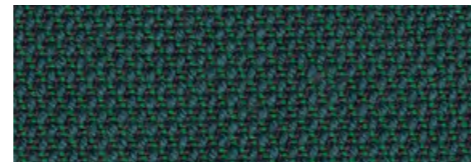

TST976



TST716

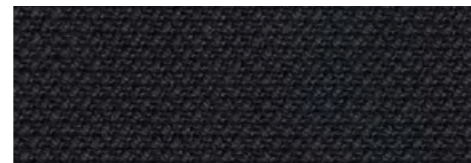


TST195


VG GORGEOUS FLUKSO  
100% PES FR - Trevira CS




TVG2153

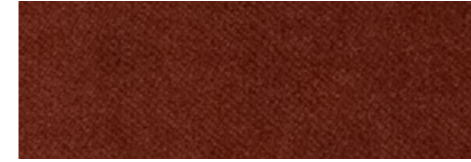

TVG2112

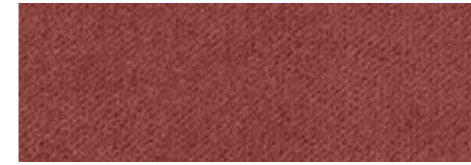

TVG2113

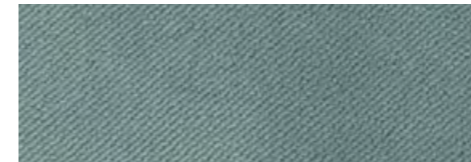

TVG2131



TVG2128




TVG2148

HE HERO KVADRAT  
96% Lana vergine / New wool  
4% Nylon




THE211

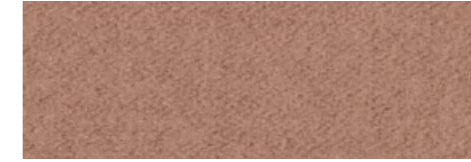

THE311




THE541

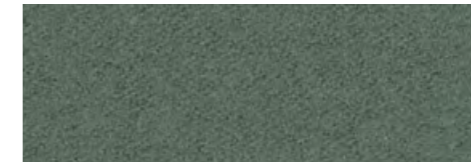

THE931




THE711

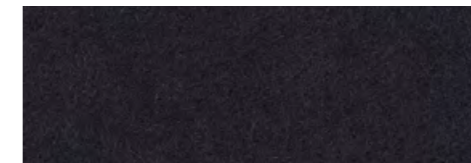

THE791


LN PANAMA DANI  
100% Pelli bovine europee /  
European cow hides

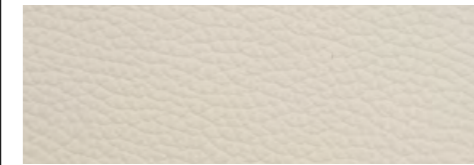


LN5506




LN5320

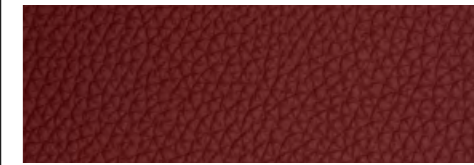


LN5210

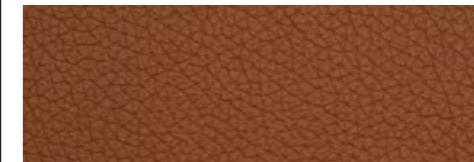

LN5080

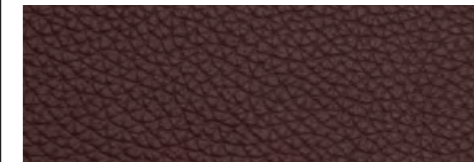

LN5220

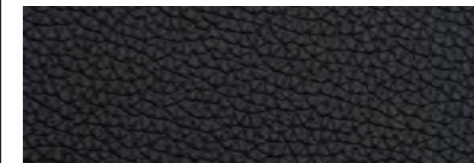

LN5300

Utilizzabile all'esterno/  
Can be used outdoors



**SPECIFICHE TESSUTI  
/ FABRIC FEATURES**

**Patio  
Kvadrat**  
560 g/mtl / g/lin.m  
50.000 Martindale

resistenza alla luce 7  
/ lightfastness 7  
EN ISO 105 B04  
EN ISO 105 B02



0575 / 19



**Remix 3  
Kvadrat**  
415 g/mtl / g/lin.m  
100.000 Martindale



0575 / 12



**Steelcut Trio 3  
Kvadrat**  
770 g/mtl / g/lin.m  
100.000 Martindale



0575 / 17



**Gorgeous  
Flukso**  
450 g/mq / g/sqm  
100.000 Martindale



**Hero  
Kvadrat**  
580 g/mtl / g/lin.m  
45.000 Martindale



0575 / 15



**Panama  
Dani**  
sp / thk 1,0-1,2 mm

resistenza allo strappo  
/ tear resistance  
20 NI EN ISO 3377-1

resistenza alla flessione  
/ flex resistance

nessuna rottura  
in 50.000 cicli  
/ no damage  
in 50.000 cycles  
EN ISO 5402