


B



L



line

e

**CARTELLA TESSUTI
/ FABRIC REFERENCE CHART**

PT PATIO KVADRAT

100% Trevira CS



VG GORGEOUS FLUKSO

100% PES FR – Trevira CS

HE HERO KVADRAT

96% Lana vergine / New wool
4% Nylon

RX REMIX 3 KVADRAT

90% Lana vergine / New wool
10% Nylon

ST STEELCUT TRIO 3 KVADRAT

90% Lana vergine / New wool
10% Nylon

LN PANAMA DANI

100% Pelli bovine europee /
European cow hides

FP PLATINUM FLUKSO

82% PVC
18% PES

G GEMMA S PUGI RG

100% Poliestere – Trevira CS /
Polyester – Trevira CS



TPT220



TVG2153




THE212



TRX123




TST133

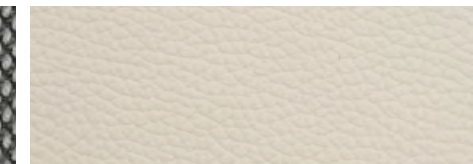


LN5506




TFP5

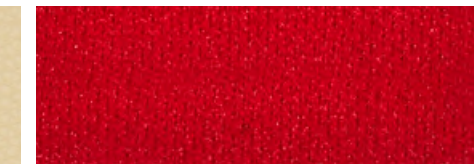

TG203

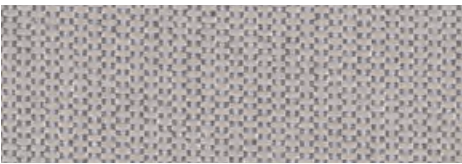

TPT150

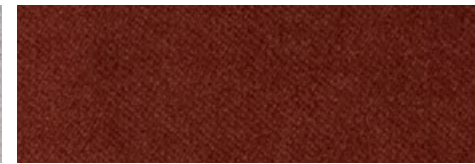

TVG2112



THE312



TRX242



TST205




LN5320




TFP12



TG651

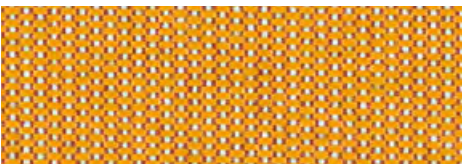


TPT450

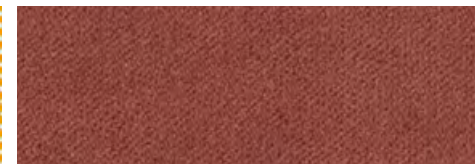


TVG2113




THE542

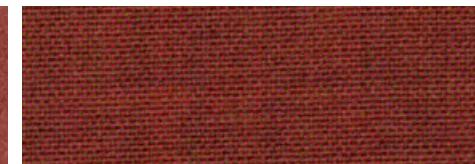


TRX653

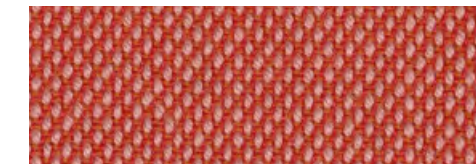

TST526

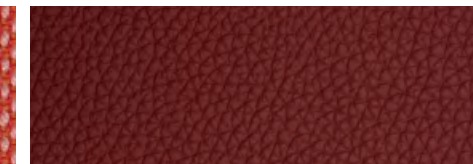

LN5210

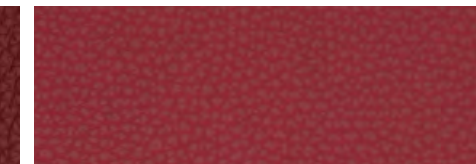

TFP30



SP SPRINKLES KVADRAT FEBRIK

40% Imbottitura in poliestere / Polyester filling
30% Nuova lana / New wool
20% Poliestere / Polyester
10% Nylon




TVG2131




THE932



TRX982

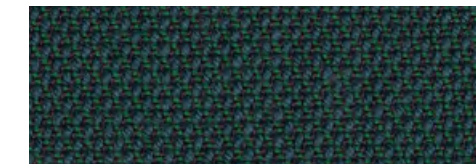


TST976

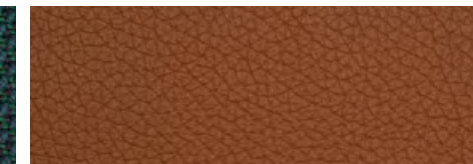

LN5080



TFP15

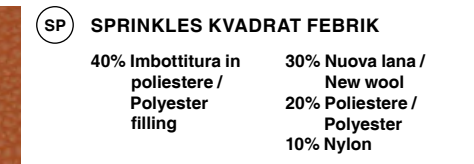

Colore speciale per Multichair 2022/
Special edition colour for Multichair 2022



TPT970




TVG2128




THE932




TRX762

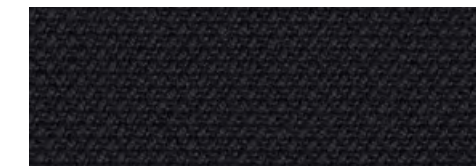

TST716

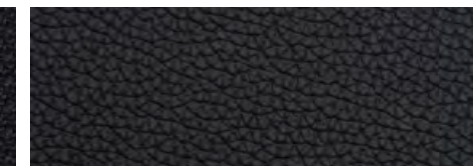

LN5220

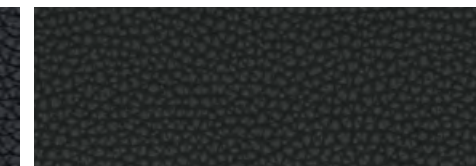

TFP22



TSP554

TVG2148

THE932

TRX173


TST195

LN5300

TFP23



LN5428

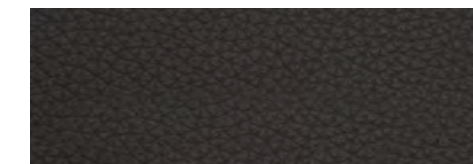

LN5310

Utilizzabile all'esterno/
Can be used outdoors

**SPECIFICHE TESSUTI
/ FABRIC FEATURES**

**Patio
Kvadrat**

560 g/mtl / g/lin.m
50.000 Martindale

resistenza alla luce 7
/ lightfastness 7
EN ISO 105 B04
EN ISO 105 B02



**Gorgeous
Flukso**

450 g/mq / g/sqm
100.000 Martindale



**Hero
Kvadrat**

580 g/mtl / g/lin.m
45.000 Martindale



**Remix 3
Kvadrat**

415 g/mtl / g/lin.m
100.000 Martindale



**Steelcut Trio 3
Kvadrat**

770 g/mtl / g/lin.m
100.000 Martindale



**Panama
Dani**

sp / thk 1,0-1,2 mm

resistenza allo strappo
/ tear resistance
20 N | EN ISO 3377 -1

resistenza alla flessione
/ flex resistance

nessuna rottura
in 50.000 cicli
/ no damage
in 50.000 cycles
EN ISO 5402



**Platinum
Flukso**

650 g/mq / g/sqm
100.000 Martindale



**Gemma S
Pugi rg**

400 g/mtl / g/lin.m
40.000 Martindale



**Sprinkles
Kvadrat Febrik**

1.070 g/mtl / g/lin.m
80.000 Martindale



B—Line

© - B-Line S.r.l.
Via Galileo Galilei, 13/B - 35030 Sarmeola di Rubano – Padova ITALY
Tel +39 049 8978245 — info@b-line.it
b-line.it — facebook.com/bline.it — instagram.com/b_line_it